

Fortinet

NSE7_LED-7.0

Fortinet NSE 7 - LAN Edge 7.0 Exam

For More Information – Visit link below:

<https://www.examsempire.com/>

Product Version

1. Up to Date products, reliable and verified.
2. Questions and Answers in PDF Format.



<https://examsempire.com/>

Visit us at: <https://www.examsempire.com/nse7-led-7-0>

Latest Version: 7.0

Question: 1

Refer to the exhibits

SSID Profiles

Device & Groups	+ Create New Edit Clone Delete Where Used Import Column Settings				
Map View					
WiFi Templates					
AP Profile					
SSID					
WIDS Profile					
Bluetooth Profile					

<input type="checkbox"/>	Name	SSID	Traffic Mode	Security Mode	Data
<input type="checkbox"/>	▼ SSIDs (4)				
<input type="checkbox"/>	CompanyPrinters	Corp_Printers	Tunnel	WPA2 Personal	AES
<input type="checkbox"/>	Employees-Red	employees	Tunnel	WPA2 Enterprise	AES
<input type="checkbox"/>	Guest-CorpPort	fortinet-cp	Tunnel	Captive Portal	
<input type="checkbox"/>	PSK	PSK	Tunnel	WPA2 Personal	AES

AP Profile

Name	FAPU431F-MainCampus				
Comments	<div>0/255</div>				
Platform	FAPU431F				
Platform Mode	Single 5G Dual 5G				
Country/ Region	United States				
AP Login Password	Set Leave Unchanged Set Empty				
Administrative Access	<input type="checkbox"/> HTTPS <input type="checkbox"/> SNMP <input type="checkbox"/> SSH				
Client Load Balancing	<input type="checkbox"/> Frequency Handoff <input type="checkbox"/> AP Handoff				
Bluetooth Profile	None				
Radio 1					
Mode	Disabled Access Point Dedicated Monitor SAM				
WIDS Profile	<input type="checkbox"/>				
Radio Resource Provision	<input type="checkbox"/>				
Band	5 GHz 802.11ax/ac/n				
Channel Width	20MHz 40MHz 80MHz 160MHz				
Short Guard Interval	<input type="checkbox"/>				
Channels	<input type="checkbox"/> 36 <input type="checkbox"/> 40 <input type="checkbox"/> 44 <input type="checkbox"/> 48 <input type="checkbox"/> 52 <input type="checkbox"/> 56 <input type="checkbox"/> 60 <input type="checkbox"/> 64 <input type="checkbox"/> 100 <input type="checkbox"/> 104 <input type="checkbox"/> 108 <input type="checkbox"/> 112 <input type="checkbox"/> 116 <input type="checkbox"/> 120 <input type="checkbox"/> 124 <input type="checkbox"/> 128 <input type="checkbox"/> 132 <input type="checkbox"/> 136 <input type="checkbox"/> 140 <input type="checkbox"/> 144 <input type="checkbox"/> 149 <input type="checkbox"/> 153 <input type="checkbox"/> 157 <input type="checkbox"/> 161				
TX Power Control	Auto Manual				
TX Power	10 - 17 dBm				
SSIDs	Tunnel Bridge Manual				
Monitor Channel Utilization	<input checked="" type="checkbox"/>				

The exhibits show the wireless network (VAP) SSID profiles defined on FortiManager and an AP profile assigned to a group of APs that are supported by FortiGate

None of the APs are broadcasting the SSIDs defined by the AP profile
Which changes do you need to make to enable the SSIDs to broadcast?

- A. In the SSIDs section enable Tunnel
- B. Enable one channel in the Channels section
- C. Enable multiple channels in the Channels section and enable Radio Resource Provision
- D. In the SSIDs section enable Manual and assign the networks manually

Answer: D

Question: 2

Which two statements about the guest portal on FortiAuthenticator are true? (Choose two.)

- A. Each remote user on FortiAuthenticator can sponsor up to 10 guest accounts
- B. Administrators must approve all guest accounts before they can be used
- C. The guest portal provides pre and post-log in services
- D. Administrators can use one or more incoming parameters to configure a mapping rule for the guest portal

Answer: CD

Explanation:

According to the FortiAuthenticator Administration Guide2, "The guest portal provides pre and post-log in services for users (such as password reset and token registration abilities), and rules and replacement messages can be configured." Therefore, option C is true. The same guide also states that "Administrators can use one or more incoming parameters to configure a mapping rule for the guest portal." Therefore, option D is true. Option A is false because remote users can sponsor any number of guest accounts, as long as they do not exceed the maximum number of guest accounts allowed by the license. Option B is false because administrators can choose to approve or reject guest accounts, or enable auto-approval.

Question: 3

Exhibit.

```
config wireless-controller wtp-profile
  edit "Main Networks - FAP-320C"
    set comment "Profile with standard networks"
    config platform
      set type 320C
    end
    set wan-port-mode wan-only
    set led-state enable
    set dtls-policy clear-text
    set max-clients 0
    set handoff-rssi 30
    set handoff-sta-thresh 30
    set handoff-roaming enable
    set ap-country GB
    set ip-fragment-preventing tcp-mss-adjust
    set tun-mtu-uplink 0
    set tun-mtu-downlink 0
    set split-tunneling-acl-path local
    set split-tunneling-acl-local-ap-subnet enable
    config split-tunneling-acl
      edit 1
        set dest-ip 192.168.5.0 255.255.255.0
      next
    end
    set allowaccess https ssh
    set login-passwd-change yes
    set lldp disable
```

Exhibit.

```

config radio-1
    set mode ap
    set band 802.11n,g-only
    set protection-mode disable
    unset powersave-optimize
    set amsdu enable
    set coexistence enable
    set short-guard-interval disable
    set channel-bonding 20MHz
    set auto-power-level disable
    set power-level 100
    set dtim 1
    set beacon-interval 100
    set rts-threshold 2346
    set channel-utilization enable
    set spectrum-analysis disable
    set wids-profile "default-wids-apscan-enabled"
    set darrrp enable
    set max-clients 0
    set max-distance 0    next
config wireless-controller vap
    edit "Corporate"
        set ssid "Corporate"
        set passphrase ENC XXXX
        set schedule "always"
        set quarantine disable
    next
end

```

Refer to the exhibits

In the wireless configuration shown in the exhibits, an AP is deployed in a remote site and has a wireless network (VAP) called Corporate deployed to it

The network is a tunneled network however clients connecting to a wireless network require access to a local printer Clients are trying to print to a printer on the remote site but are unable to do so

Which configuration change is required to allow clients connected to the Corporate SSID to print locally?

- A. Configure split-tunneling in the vap configuration
- B. Configure split-tunneling in the wtp-profile configuration
- C. Disable the Block Intra-SSID Traffic (intra-vap-privacy) setting on the SSID (VAP) profile
- D. Configure the printer as a wireless client on the Corporate wireless network

Answer: A

Explanation:

According to the Fortinet documentation¹, "Split tunneling allows you to specify which traffic is tunneled to the FortiGate and which traffic is sent directly to the Internet. This can improve performance

and reduce bandwidth usage." Therefore, by configuring split-tunneling in the vap configuration, you can allow the clients connected to the Corporate SSID to access both the corporate network and the local printer. Option B is incorrect because split-tunneling is configured at the vap level, not the wtp-profile level. Option C is incorrect because blocking intra-SSID traffic prevents wireless clients on the

same SSID from communicating with each other, which is not related to accessing a local printer. Option D is unnecessary and impractical because the printer does not need to be a wireless client on the Corporate wireless network to be accessible by the clients.

Question: 4

Refer to the exhibit.

The exhibit shows two parts of a FortiGate configuration. On the left is the 'Edit NAC Policies' window in FortiManager. The policy is named 'Training', has a status of 'Enabled', and is assigned to 'FortiLink'. The 'Device Patterns' section shows a 'Device' pattern with MAC address '70:88:4b:8c:4a:ce' and 'Linux' as the operating system. The 'Switch Controller Action' is set to 'Assign VLAN' with 'Students' as the VLAN. On the right is the FortiGate CLI output for 'diagnose switch-controller switch-info mac-table'. It shows a list of MAC addresses and their associated VLANs. The MAC address '70:88:4b:8c:4a:ce' is listed as being in VLAN 4089, which is the 'onboarding' VLAN. The output also shows that the device is not matching any NAC policy.

Examine the FortiManager configuration and FortiGate CLI output shown in the exhibit. An administrator is testing the NAC feature. The test device is connected to a managed FortiSwitch device {S224EPTF19"53€7} on port2. After applying the NAC policy on port2 and generating traffic on the test device, the test device is not matching the NAC policy; therefore, the test device remains in the onboarding VLAN. Based on the information shown in the exhibit, which two scenarios are likely to cause this issue? (Choose two.)

- A. Management communication between FortiGate and FortiSwitch is down
- B. The MAC address configured on the NAC policy is incorrect
- C. The device operating system detected by FortiGate is not Linux
- D. Device detection is not enabled on VLAN 4089

Answer: CD


Explanation:

According to the FortiManager configuration, the NAC policy is set to match devices with the MAC address of 00:0c:29:6a:2b:3c and the operating system of Linux. However, according to the FortiGate CLI output, the test device has a different MAC address of 00:0c:29:6a:2b:3d. Therefore, option B is true. Option A is also true because the FortiSwitch device status is shown as down, which means that the management communication between FortiGate and FortiSwitch is not working properly. This could prevent the NAC policy from being applied correctly. Option C is false because the device operating

system detected by FortiGate is Linux, which matches the NAC policy. Option D is false because device detection is enabled on VLAN 4089, as shown by the command “config switch-controller vlan”.

Question: 5

Refer to the exhibit.

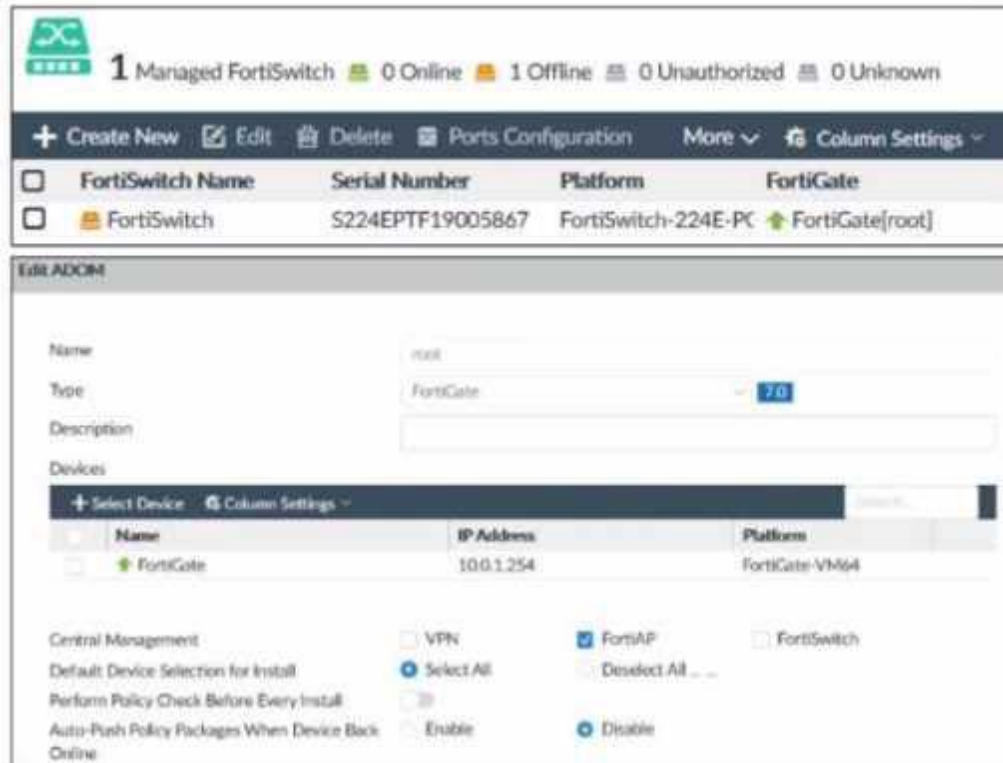

Examine the FortiManager information shown in the exhibit
Which two statements about the FortiManager status are true" (Choose two)

- A. FortiSwitch manager is working in per-device management mode
- B. FortiSwitch is not authorized
- C. FortiSwitch manager is working in central management mode
- D. FortiSwitch is authorized and offline

Answer: AD

Thank You for Trying Our Product

Special 16 USD Discount Coupon: NSZUBG3X

Email: support@examsempire.com

**Check our Customer Testimonials and ratings
available on every product page.**

Visit our website.

<https://examsempire.com/>